


Technical Specifications

HP Z24n G3 WUXGA Display

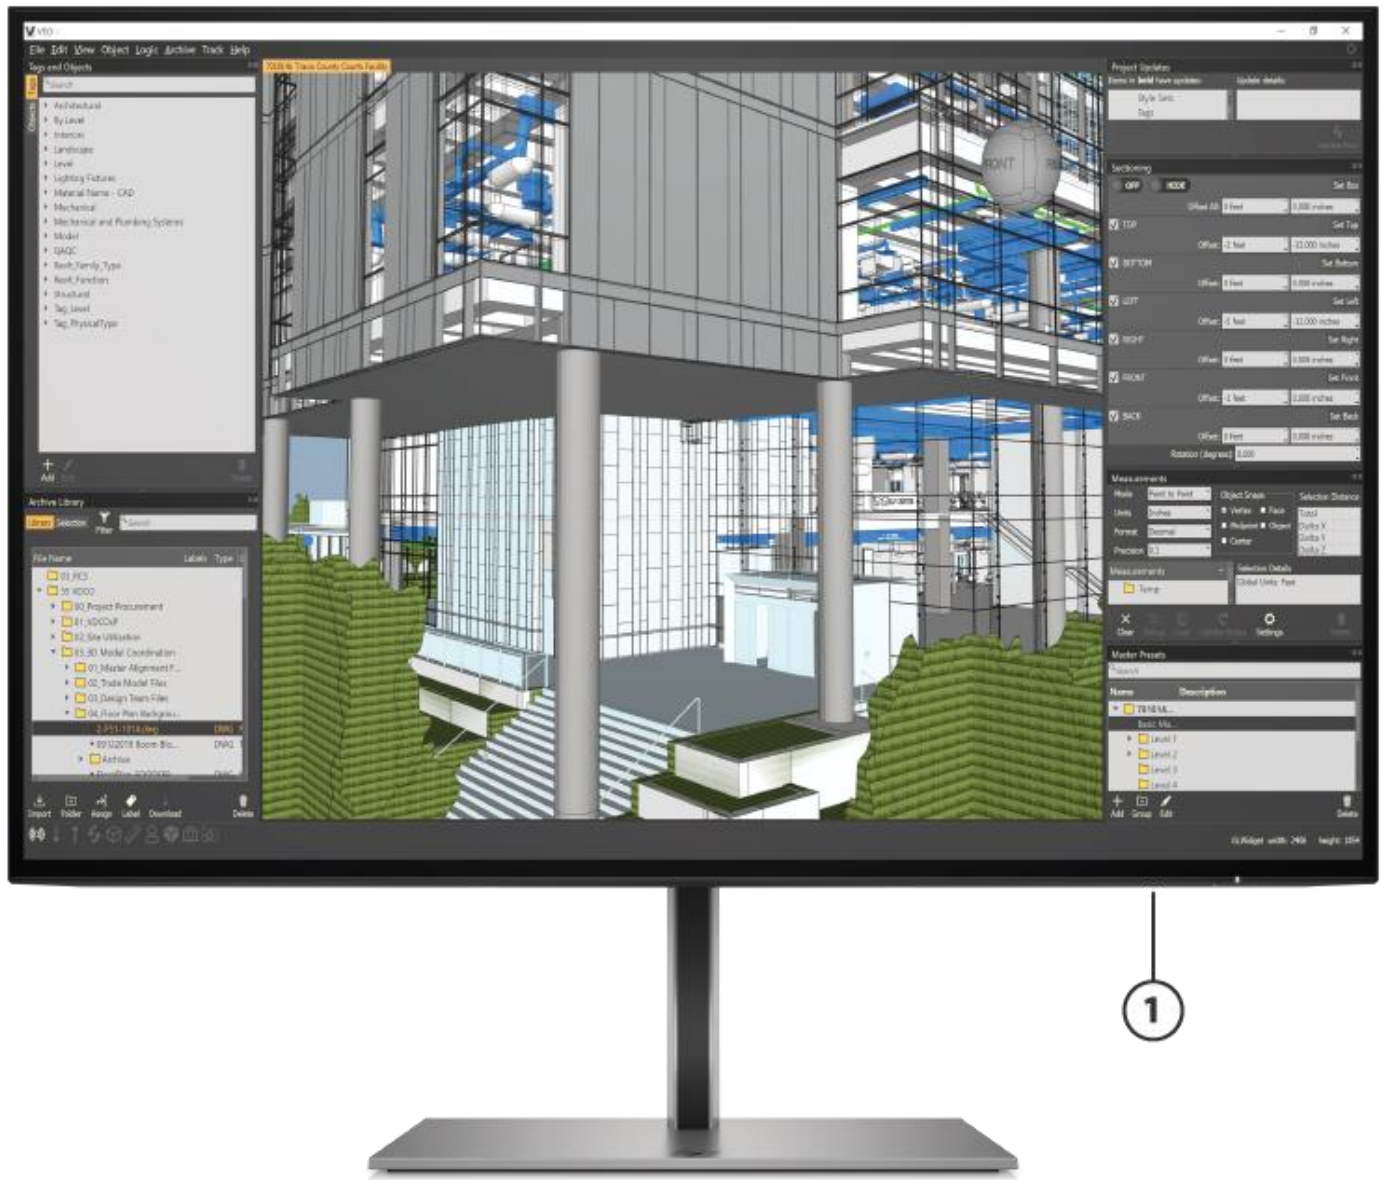


Front

1. Power button

Technical Specifications

HP Z24n G3 WUXGA Display

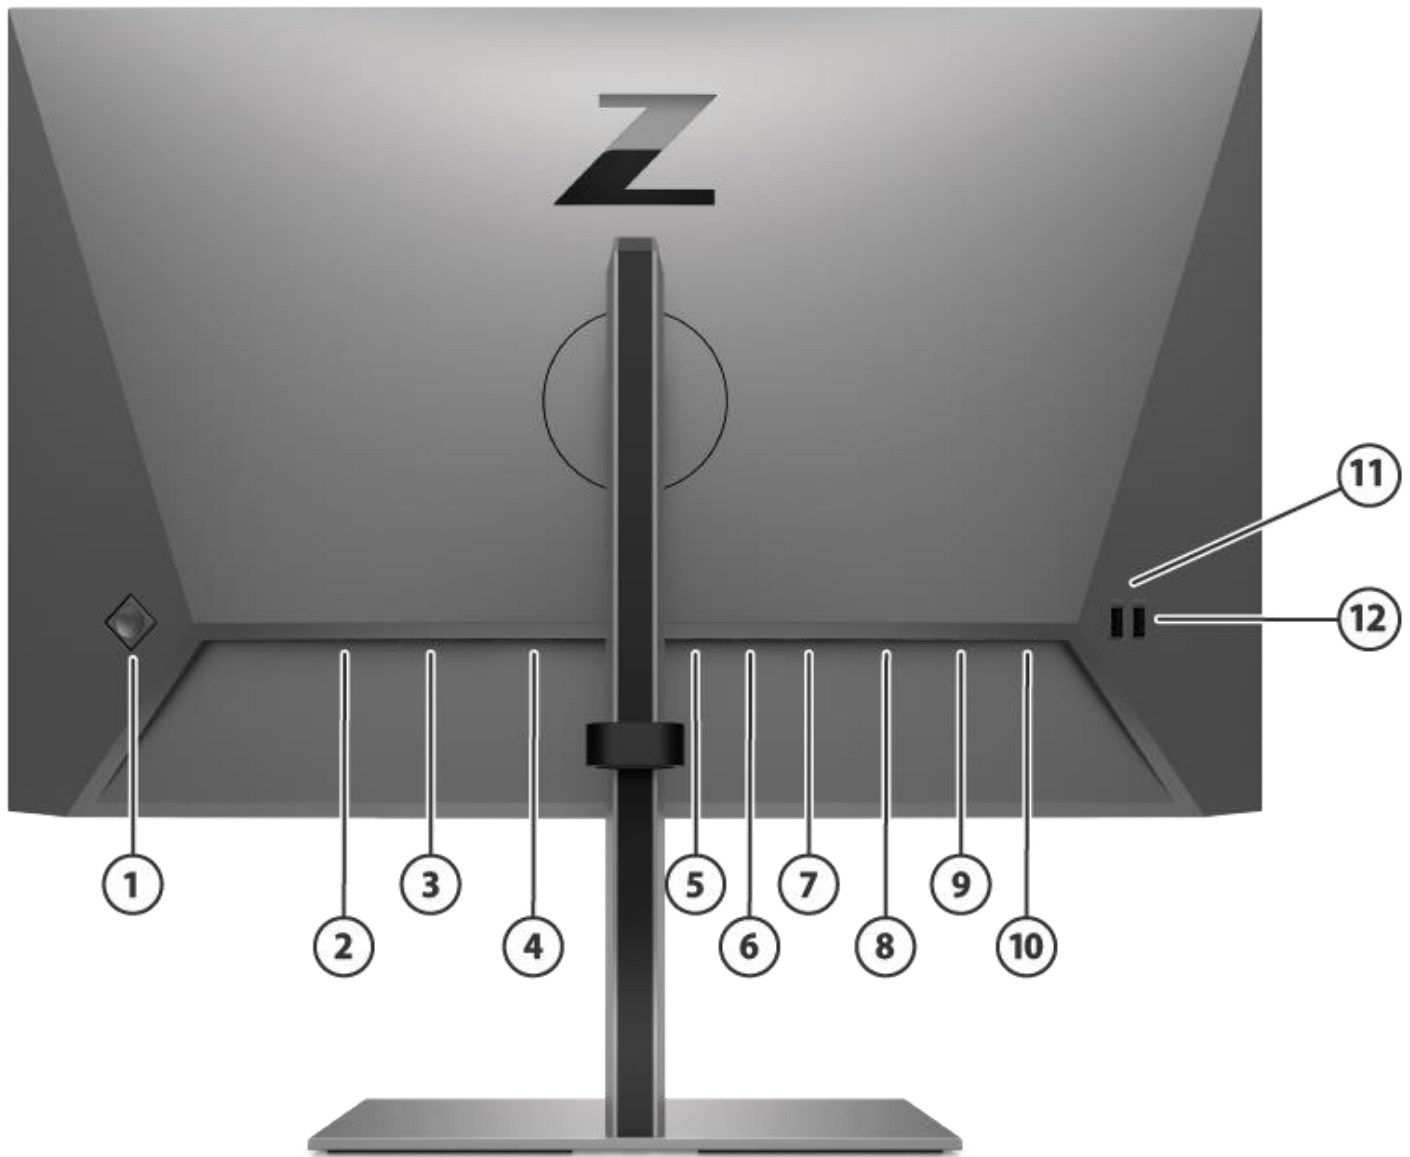

1. OSD control
2. Security cable slot
3. Master power switch
4. Power connector
5. HDMI port
6. DisplayPort™ connector

Back

7. DisplayPort™ connector (out)
8. USB Type-B port (upstream)
9. USB port
10. USB port (Battery charging 1.2, 7.5W)
11. USB Port
12. USB port (Battery charging 1.2, 7.5W)

Technical Specifications

Panel Specifications	Display Size (Diagonal)	24"
	Panel Technology	IPS
	Refresh Rate	60 Hz
	Panel Bit Depth	8 bit (6bit + FRC)
	Aspect Ratio	16:10
	Brightness (Typical)	350 nits
	Contrast Ratio (Static)	1000:1
	Dynamic Contrast Ratio	10M:1
	Flicker Free	Yes
	Pixel Pitch	0.270mm
	Pixels Per Inch (Ppi)	96 PPI
	Backlight Lamp Life Minimum (To Half Brightness - In Hours)	30k
	Backlight Type	Edge-lit
	Screen Treatment	Anti-glare
	Hardness	3H
	Haze	25%
	Response Time (Typical)	5ms GtG (with overdrive)
	Horizontal Viewing Angle (Typical Cr>10)	178°
	Vertical Viewing Angle (Typical Cr>10)	178°
	Panel Active Area (W X H)	518.4(H)*324.0(V)
NOTE: Performance Specifications Represent The Typical Specifications Provided By HP's Component Manufacturers; Actual Performance May Vary Either Higher Or Lower.		
Color Management	Factory Color Calibrated	Yes (Delta E <=2)
	Calibrated Color Presets	sRGB, BT.709, P3 D65 (Production after Feb '21)
	RGB Channel Adjust	Yes, Gain
	Default Color Temperature	sRGB
Color	sRGB	99 %
	P3 D65	85%
Monitor Specifications	Bezel	4-sided Micro Edge
	Color	(Head) Turbo Silver; (Stand) Turbo Silver
	Tilt	-5 to +20°
	Swivel	±45°
	Pivot	±90
	Height Adjust Range	150mm
	VESA Mounting	100 mm x 100 mm (bracket included)
	Security Lock Ready	Standard Security Lock Slot
	Detachable Stand	Yes
	Warranty (Number of Years)	3/3/0 for LA, NA, EMEA, APJ; (3/3/3 in select APJ Countries)
	Low Blue Light Mode	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution certified)
	Display Management Software	HP Display Center
	On Screen Display	Joystick
	On Screen Controls	Brightness +, Color, Image, Input, Power, Menu, Management, Information, Exit
	User-Assignable Function Buttons	Yes, 4 buttons
	Native Resolution	WUXGA (1920 x 1200)
	Maximum Resolution	1920×1200 @ 60HZ

Technical Specifications

	Preset Graphic Modes/Supported Resolutions	640 × 480@60Hz 800 × 600@60Hz 1024 × 768@60Hz 1280 × 720@60Hz 1280 × 800@60Hz 1280 × 1024@60Hz 1440 × 900@60Hz 1600 × 900@60Hz 1600 × 1200@60Hz 1680 × 1050@60Hz 1920 × 1080@60Hz 1920 × 1200@60Hz
	High Definition Video Formats	720 × 480p@60Hz 720 × 576p@50Hz 1280 × 720p@50Hz 1280 × 720p@60Hz 1920 × 1080p@50Hz 1920 × 1080p@60Hz
	Minimum Vertical Scan Rate	50 Hz
	Maximum Vertical Scan Rate	60 Hz
	Minimum Horizontal Scan Rate	30.0 kHz
	Maximum Horizontal Scan Rate	75.0 kHz
	Maximum Pixel Clock	170 MHz
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
Connector Types	DisplayPort™	1 DisplayPort™ 1.2
	DisplayPort™ Out	1 DisplayPort™ 1.2-out
	HDMI	1 HDMI 1.4
	USB- A	4 USB-A 3.2 Gen1 (2 for battery charging 1.2, 7.5W)
	USB-B (Hub enablement)	1 USB-B
Special Features	DaisyChain/DisplayPort Multi stream Transport (MST)	Yes
	User Updateable Firmware	Yes
Power & Operating Specs	Power Supply	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption- MAX	63 W
	Energy Saving/Stand By Mode	0.5 W
	Power Consumption- Typical	28 W
	Power Cable Length	1.9m
ENERGY STAR Data	Operational Mode at 100 VAC	14.92 W
	Operational Mode at 115 VAC	14.85 W
	Operational Mode at 230 VAC	14.84 W
EU Energy Efficiency Class (ERP Lot-5)	On-mode Power Consumption	16.6 W
	Annual Power Consumption	25 kWh
	Energy Efficiency Class	E
Operating Conditions	Operating Temperature - Celsius	5° – 35°C
	Operating Temperature - Fahrenheit	41° – 95°F
	Non-Operating Temperature - Celsius	–34° – 60°C

Technical Specifications

	Non-Operating Temperature - Fahrenheit	29° – 140°F	
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)	
	Non-Operating Humidity	5 – 95%	
	Operating Altitude	0 – 5,000 m (16,400 ft.)	
	Non-operating Altitude	0 – 12.192 m (40,000 ft.)	
Environmental Features and Certifications	Mercury-free LED display backlighting	Yes, Mercury-free LED backlighting	
	Arsenic-Free Display Glass	Yes	
	Low Halogen	Yes	
	Agency Approvals And Certifications	WW application CE, CB, KC/KCC/NOM/PSB/EAC/GS/TUV-S/ISO 9241-307/ Low Blue Light/ BIS/CTUVus/CCC/SEPA/Energy Star/TCO/TCO Certified Edge/VCCI/FCC/BSMI/WEEE/UAE/Ukraine/ERP/ISC	
	Microsoft WHQL Certification	Win 11	
	ENERGY STAR® Certified	Yes	
	EPEAT® Registered	Yes	
	Regions need to verify by country	CEL Grade 1*	
	China Energy Label	*Monitors produced before June 1st 2024 comply with China regulation GB 21520-2015.	
	TCO Certified Edge	Yes	
TCO Certified	Yes		
SmartWay Transport Partnership - NA only	Yes (NA sku)		
Contains Recycled Plastics	Contains Recycled Plastics	81.07%	
	Recyclable Packaging (Box, packing materials)	100% recyclable packaging.	
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	53.17 x 19.5 x 52.14 cm	20.93 x 7.68 x 20.53 in
	Product Dimensions (Packed) (W x D x H)	62.5 x 41.5 x 14.2 cm	24.61 x 16.34 x 5.59 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	53.17 x 3.85 x 34.29 cm	20.93 x 1.52 x 13.5 in
	Base Area Footprint (w x d mm)	232 X 195 mm	9.13 X 7.7 in
	Bezel Measurements - Metric	Bottom Cover :521.33 mm	Bottom Cover :20.52 in
	Product Weight (Unpacked with stand)	4.9 kg	10.8 lb
	Product Weight (Packed)	7.6 kg	16.7 lb
	Product Weight (Head Only)	3.7 kg	8.2 lb
What's in the box?	Documentation kit DP1.4 Cable (1.8m) HDMI 1.4 cable (1.8m, Production after May'21) USB 3.0 Type A to B (1.8m) Power cable VESA Adapter Cable Holder		

Technical Specifications

**User Guide and
Warranty Languages**

User Guide Languages

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

Warranty Languages

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

Technical Specifications

Copyright © 2024 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

Summary

Change Log			
January 12, 2021	V1 to V2	Updated	Technical Specifications
February 28, 2021	V2 to V3	Updated	Energy Efficiency Class
April 15, 2021	V3 to V4	Update	VESA Mounting Specs
June 1, 2021	V4 to V5	Update	Color Management
June 24, 2021	V5 to V6	Update	What's in the box? section
March 22, 2023	V6 to V7	Update	VESA Mounting specs
December 21, 2023	V7 to V8	Added	Windows 11
May 17, 2024	V8 to V9	Remove	CEL and CECP
May 30, 2024	V9 to V10	Added	CEL and disclaimer